

DIRECTOR

| | |
|--|----|
| Front Panel: | 4 |
| 1 User Login | 4 |
| 1.1 Starting System | 4 |
| 2 Setup Wizard | 4 |
| 2.1 Wizard GUI | 4 |
| 2.2 QR code GUI | 5 |
| 2.3 Administrator Login GUI | 5 |
| 2.4 Basic Setup | 6 |
| 2.5 Network Setup | 7 |
| 2.6 Network Test | 7 |
| 2.7 CMS Set up | 8 |
| 2.8 HDD Setup | 9 |
| 2.9 Setup Wizard Done | 9 |
| 3.Video GUI Set Up & Function Board Description: | 10 |
| 3.1 IPC Cams Set Up | 10 |
| 3.2 Function Board Description | 11 |
| System Operation | 13 |
| 4.1 User Login | 13 |
| 4.2 Main Menu Operation | 14 |
| 5 Basic Setup | 15 |
| 4 Advance Setup | 22 |
| 6.1 Network Setup | 23 |
| 6.1.1 Lan Setup | 23 |
| 6.1.2 WIFI Setup | 23 |
| 6.1.3 3G/4G Setup | 24 |
| 6.2 IPC Cams Set up | 24 |
| 6.3Network Application | 27 |
| 6.3.1 CMS | 27 |
| 6.3.2 E-MAIL | 27 |
| 6.3.3 FTP | 28 |
| 6.4 P.T.Z | 29 |
| 6.5 Alarm Setup | 29 |
| 6.5.1 Motion Detection | 29 |
| 6.5.2 Sensor Alarm | 31 |
| 6.5.3 Video Loss | 33 |
| 6.5.4 Other | 35 |
| 6.6 Capture | 36 |
| 7 Search | 37 |
| 8 Log Query | 39 |
| 9 Vehicle | 40 |
| 10.HDD | 41 |
| 11 Information | 43 |
| 12 Maintenace | 47 |

4CH NVR HDD MOBILE DVR

FEATURES:

- Built-in high performance Hisilicon chipsets, coded with H.264 standard, high compression rate and image quality
- 4CH AV Inputs with NVR 1080P/720P/960H/D1/CIF optional, 1CH synchronized AV output, 1CH VGA output
- 4CH local recording with 1080P resolution in real time

Power:

- Professional In-Vehicle power design, 8-32V DC Wide Voltage Range
- Multi protection circuits like under-voltage, short, reversed plug-in
- Smart power management system, shutdown under low voltage, low consumption

Data Storage:

- Special file management system to encrypt and protect the data
- Proprietary technology to detect the bad track of the hard drive which can make sure the continuity of video and long service life of the hard drive
- Built-in ultracapacitor, avoid data loss and sd card damage caused by sudden outage
- Support 2.5 inch HDD/SSD, maximum 2TB
- Support SD card storage, maximum 256GB
- Support hard disk heating

Transmission Interface:

- Support 3G/4G transmission, LTE/HSUPA/HSDPA/WCDMA/EVDO/TD-SCDMA
- Support GPS/BD optional, high sensitivity, fast positioning
- Support wireless download by WiFi, 802.11b/g/n, 2.4GHz

Technical parameter:

| Item | Device parameter | Performance |
|---------------|---------------------|------------------------------|
| System | Main processor | Hi3520DV300 |
| | Operating system | Embedded Linux OS |
| | Operating language | Chinese/English |
| | Operating interface | GUI, support mouse |
| | Password security | User password/Admin password |
| Audio & Video | Video standard | PAL/NTSC |
| | Video compression | H.264 |
| | Image resolution | 1080P/720P/960H/D1/CIF |
| | Playback quality | 1080P/720P/960H/D1/CIF |
| | Compound mode | A variety of ways |
| | Decoding ability | 1ch 1080P real time |
| | Recording quality | Class 1-6 optional |

| | | |
|----------------------|---------------------|--|
| | Image display | Single/QUAD display optional |
| | Audio Compression | G.726 |
| | Audio recording | Audio & Video synchronized recording |
| Recording & Playback | Recording mode | Manual/Alarm |
| | Video bit rate | Full frame 4096Mbps, 6 classes image quality optional |
| | Audio bit rate | 8KB/s |
| | Storage media | SD card + HDD/SSD storage |
| | Video inquiry | Inquiry by channel/Recording type |
| | Local playback | Playback by file |
| Firmware upgrading | Upgrading mode | Manual/Automatic/Remote/Emergency Recovery |
| | Upgrading method | USB disk/Wireless network/SD card |
| Interface | AV input | 4ch aviation interface |
| | AV output | 1ch VGA video output, 1ch aviation AV output |
| | Alarm input | 4 digital inputs (4 Positive/Negative trigger) |
| | HDD/SSD | 1 HDD/SSD (up to 2TB, support hot plug/unplug) |
| | SD card | 2 SDXC High speed card (up to 256GB) |
| | USB interface | 1 USB 2.0 (support U disk/mouse) |
| | Ignition input | 1 ACC signal |
| | UART | 1 485 |
| | LED Indication | PWR/RUN/GPS/NET |
| | Disk lock | 1 |
| | Debug port | 1 |
| | RJ45 | 1 |
| Function extension | GPS/BD | Support detecting antenna Plug in/Unplug/Short circuit |
| | 3G/4G | Supports CDMA/EVDO/GPRS/WCDMA/FDD LTE/TDD LTE |
| | WIFI | 802.11b/g/n, 2.4GHz |
| Others | Power input | 8~32V DC |
| | Power output | 5V 300mA |
| | Power consumption | Standby 3mA Maximum consumption 30W @12V 2.5A @24V 1.25A |
| | Working temperature | -20 --- 70℃ |
| | Storage | 1080N 1.2G/h/channel 720P 1G/h/channel 960H 750M/h/channel |
| | Dimension | 162mm*180mm*50.5mm |

Front Panel:



1 User Login

1.1 Starting System

Power On/Off


After the power is on, the system will perform a basic system check and will enter the real-time loading display interface. Please be patient. Once the system is loaded, you will see a wizard interface.

2 Setup Wizard

Setup Wizard: The setup wizard can guide you to set up the NVR general parameters, such as user management, system settings, CMS settings, hard disk format, etc to implement the basic functions of the NVR, if you need to personalize the settings, you can log in to the main menu to set.

2.1 Wizard GUI

Well recommended that you can complete the NVR basic configuration via Set up Wizard for first time start up, like the picture below:

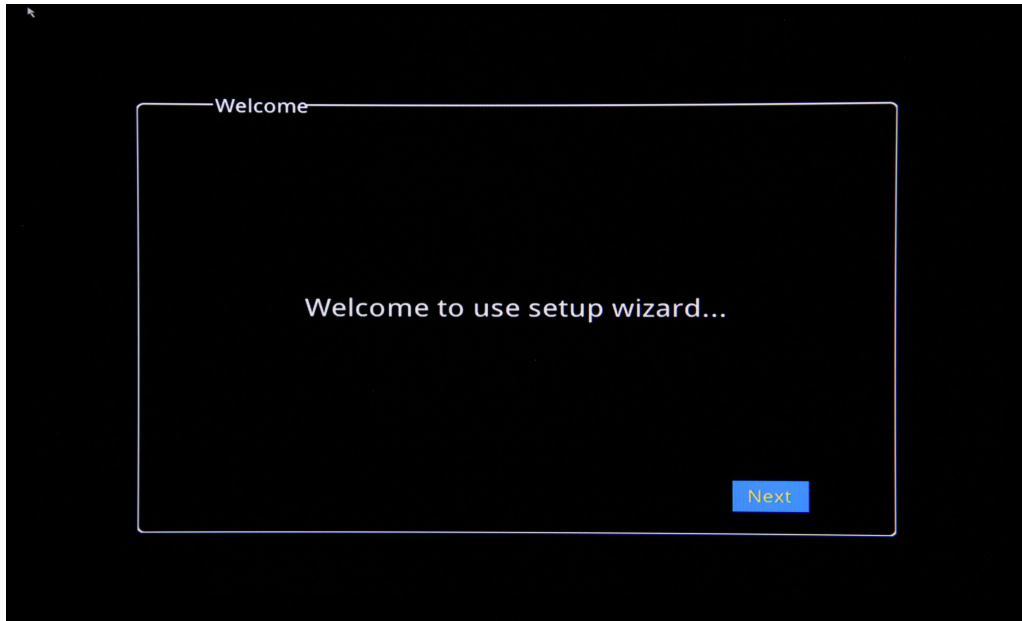

2.2 QR code GUI


Scan QR Code GUI to download Phone APP for remote monitoring, and then click "Next"



2.3 Administrator Login GUI


NVR Default Admin account: User name: admin, Password:(Null), Click "Next", like the picture as follows:

Noted: Well recommended to revise Admin account in NVR Main Menu

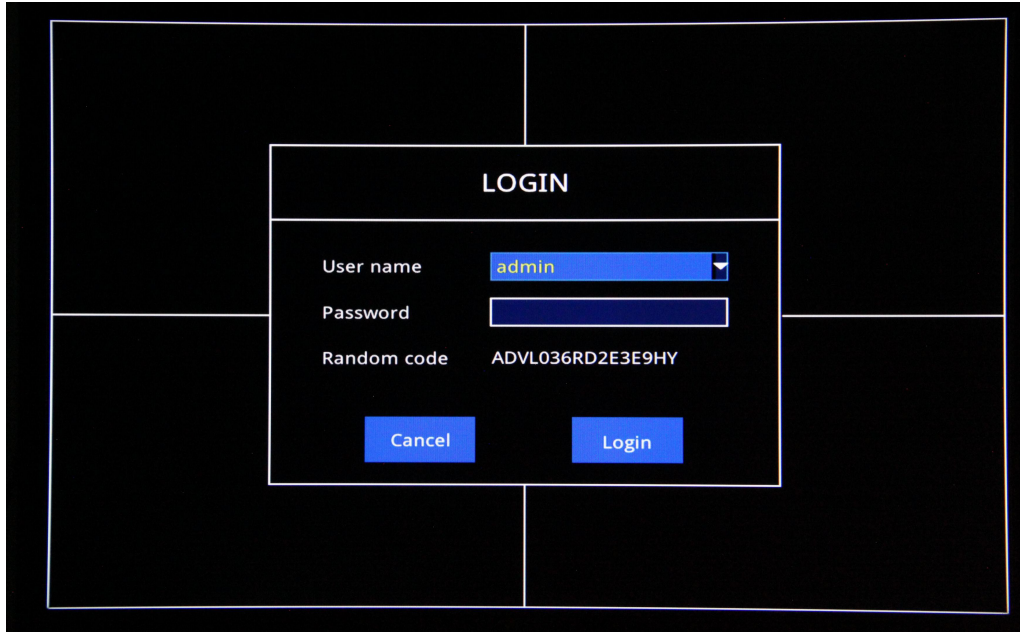

2.4 Basic Setup

Date/Time、Date Format、Time Format、Time Zone、PAL/NTSC、Language to set up based on your requirement, Like Picture Below:

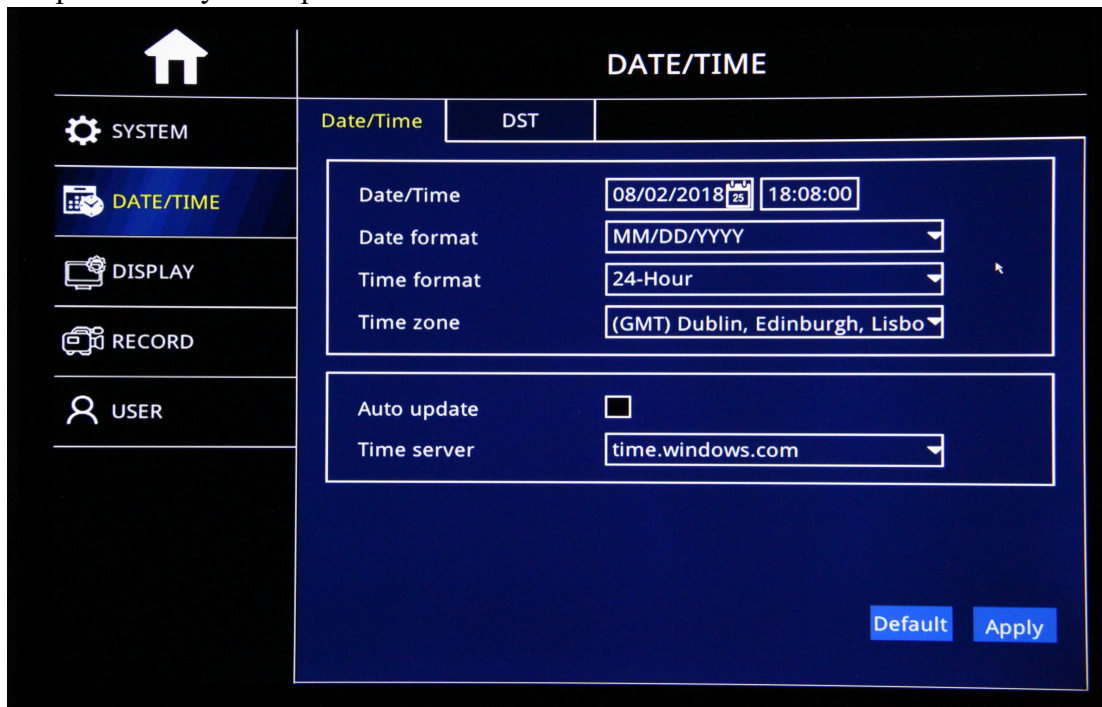

- **Date/Time Setup:** Click calendar Button to settle current date
- **Date Format:** 有“MM/DD/YYYY”、“YYYY-MM-DD”“DD/MM/YYYY” Optional
- **Time Format:** “24-Hour”/“12-Hour” Format Optional.
- **Time Zone:** Set Up time zone based on your relative time zone
- **Noted:** After Time Zone Set up, the device time will automatically adjust to be the time of relative time zone.
- **Video Format:** “PAL”/“NTSC”Optional

- **Language:** English, Chinese, Russia etc Optional

2.5 Network Setup

Settle Static IP or Auto Obtain IP to Set up NVR network(the same Segment as IP cams),like the picture as follows:

Network

Obtain an IP address automatically

Use the following IP address

IP address

Subnet mask

Default gateway

Obtain DNS server address automatically

Use the following DNS server addresses

Preferred DNS server

Alternate DNS server


2.6 Network Test

System will automatically test the network setup,If pass, Click “Next”,If not,Click“Prev”to back last page and reset,like the picture below:

Network test

| | |
|----------------------|-----------------|
| Network status | Connected |
| IP address(LAN) | 192.168.1.234 |
| Subnet mask | 255.255.255.0 |
| Default gateway | 192.168.1.1 |
| Preferred DNS server | 8.8.8.8 |
| Alternate DNS server | 202.96.134.133 |
| IP address(WAN) | 119.139.117.161 |

2.7 CMS Set up

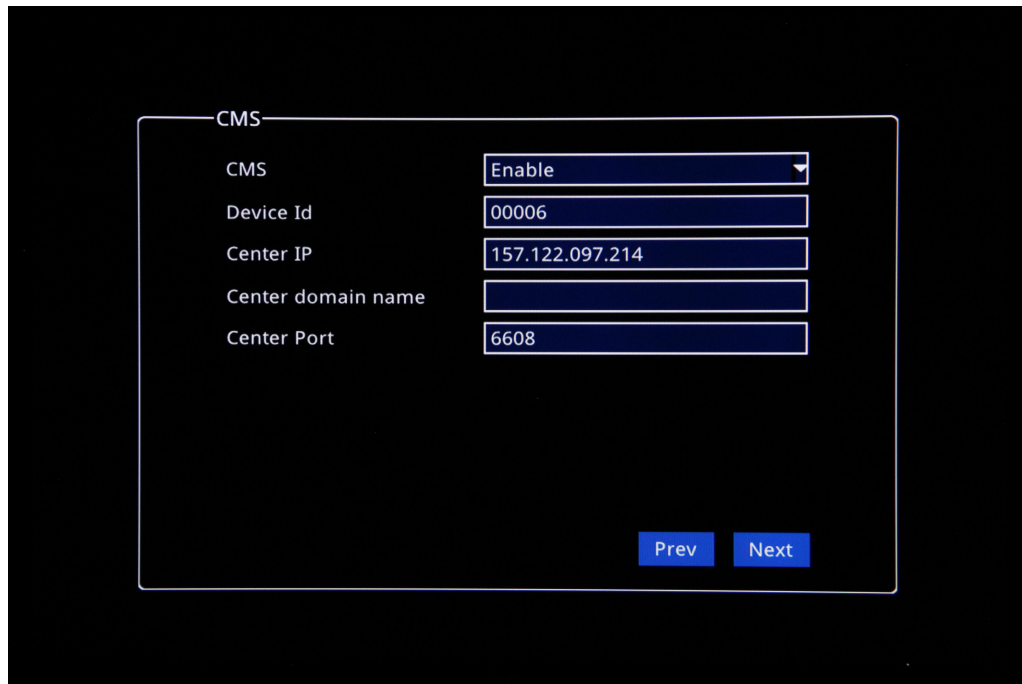

| | |
|--------------------|-----------------|
| CMS | Enable |
| Device Id | 00006 |
| Center IP | 157.122.097.214 |
| Center domain name | |
| Center Port | 6608 |

Prev Next

CMS: 『Enable/Disable』 ,

Enable: Start CMS Server Function, **Disable:** Stop CMS Server Function.

Device ID: Device Unique ID(Vendor Offer);

Center IP: Input CMS Server IP (Client's server or Vendor Offer) ;


Center Domain name: Input CMS Domain Name(Client's Server or Vendor Offer);

Center Port: Default 6608;

Noted: Center IP and Center Domain Name only can use one at the same time.

Like the Picture as follows:

2.8 HDD Setup

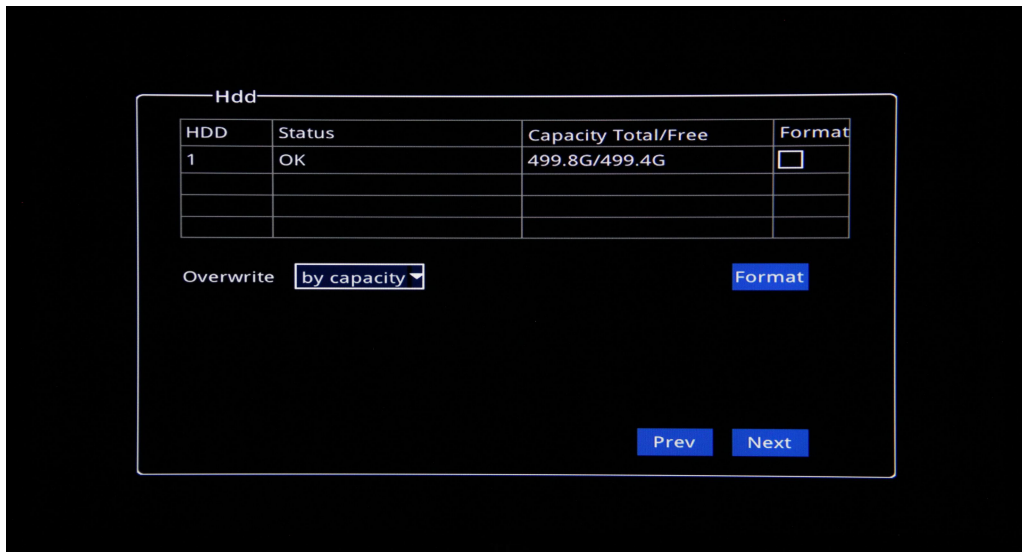

HDD: Check HDD capacity and HDD qty.


Format HDD: Check "Format" HDD, click "Format".

Note: HDD needs to format for 1st time use in Device so that can work normally

Auto Overwrite: "By Day, By Capacity and Never", 3pcs Options, like the picture as follows:

After HDD Setup, click "Next" to save all the setup parameters.

2.9 Setup Wizard Done

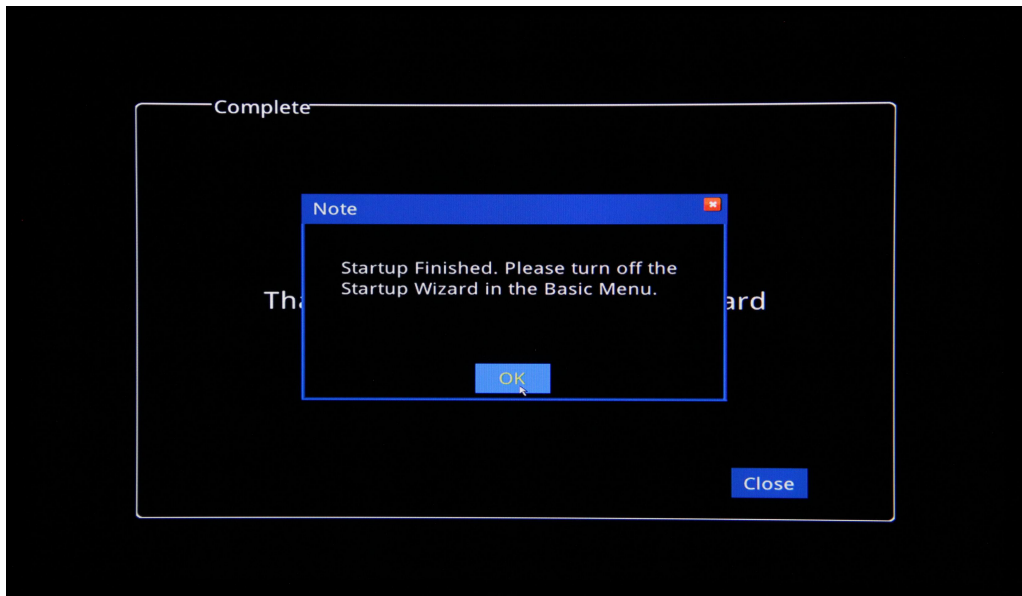

Click "OK" shut off prompt Frame and Click "close", log out Wizard setup .

3.Video GUI Set Up & Function Board


Description:

3.1 IPC Cams Set Up

After Wizard Set up, Will show Video GUI and Click“+”to add IPC cams and input IPC cam info,like the Pictures below:




Noted: Quick Add IPC cams: Click “Search” to Search out all IPC cams address and click “Add” based on your needs.

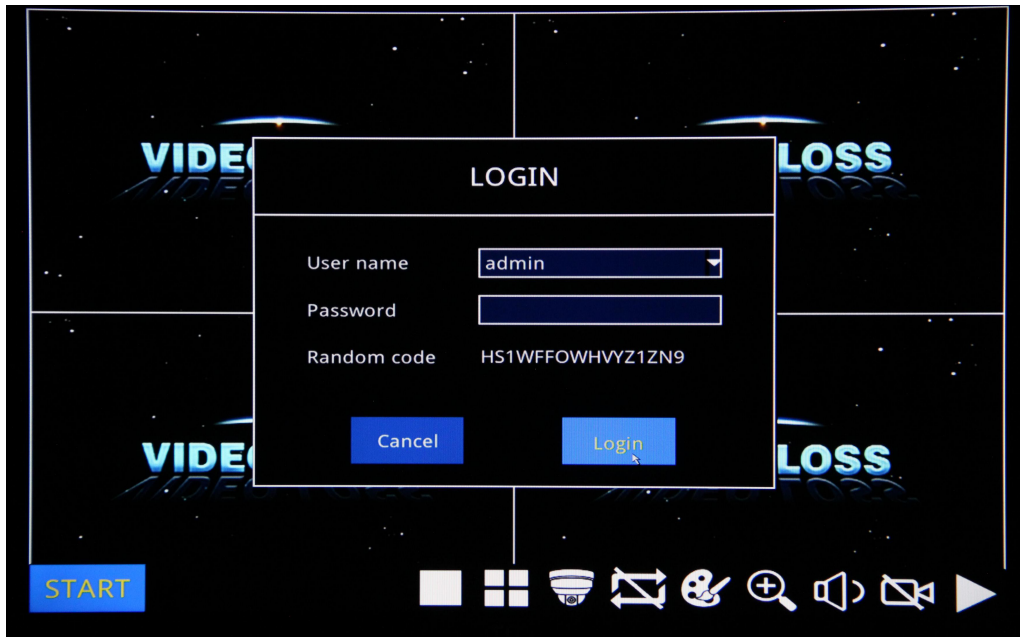







3.2 Function Board Description

Function Board GUI Below:




Function Buttons:

- 1)  Button: Login NVR Main Menu, like the picture below:
- 2)  Single Channel Display: Click "
- 3)  4CH Display: Display 4 channels video at the same time.
- 4)  PTZ Setup: PTZ Control GUI, like picture below.

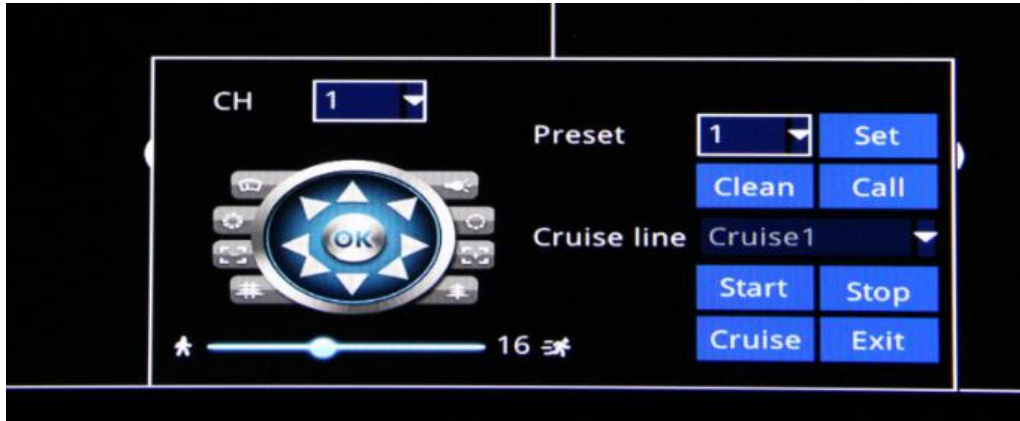

- Check relative PTZ channel.
- The user can control the gimbal up, top left, down, bottom right, left, bottom left, right, top right or stop rotation; can adjust the rotation speed of the gimbal (range "1 - 32" adjustable), focus, adjustment Focus and aperture; select the serial number of the preset point.
- Reset Setup: Check relative PTZ channel to set up Reset Points.
- Cruise Line Setup, Click "Cruise" to add or delete Cruise Line, Click "Start/Stop" to Start/Stop Cruise and Click "Exit" to log out PTZ setup.



- 5) : Auto Channel Cruise: After set up "Auto Sequence" in Main Menu, Click the button to start/Stop channel Cruise functions



- 6)  Color Set up: Color Set Up GUI, like Picture below.



CH: To check the Channel which go on Color Setup


BRI: Set up “Brightness”

CON: Set Up “Contrast”


HUE: Set up “Hue”


SAT: Set Up “Saturation”


SHARP: Set up “ Sharp”

- 7)  Partial enlargement: Drag Mouse to select a special area to auto enlarge.



- 8)  Audio Adjustment: To control Audio output volume,like Monitor audio output


- 9)  Start/Stop Record : Start/Stop Video record。

10.  Record Query: Click the button to open “Playback”GUI to Query and Playback recorded video.


System Operation

4.1 User Login

Click”Start” to show Login GUI and input user name and password to log in.

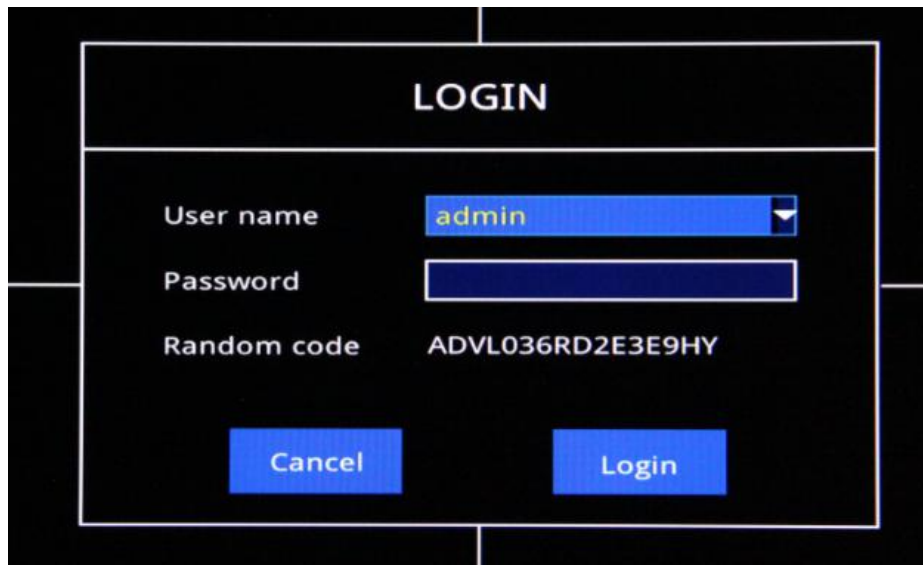

4.2 Main Menu Operation

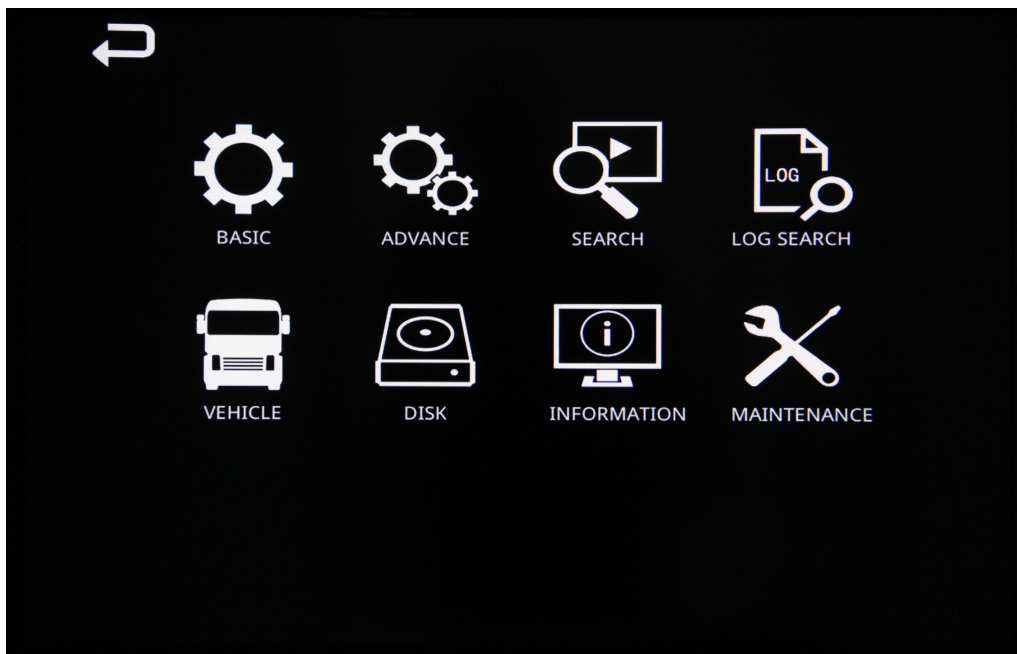


After login, Click left mouse to come into relative setup Module, like the picture below:

- Basic Setup: Including: System Setup, Date/Time Setup, Display Setup, Record Setup and User setup.
- Advance Setup: Including: Alarm Setup, Network Setup, Network Application Setup, PTZ Setup, IPC Cams setup and Snapshot.
- Video Query: Search and Display Recorded video.
- Log Search: Query the operation Logs and Alarm log Saved in Local System.
- Vehicle Management: Vehicle info and Delay time setup

- Disk Management: HDD and USB Storage.
- Information: Check Device, Network, Online User, Record and Cams info
- Maintenance: Auto Maintain, Firmware Upgrade, Standby, Reboot, Export/Import Setting etc

5 Basic Setup


5.1 System Setup:

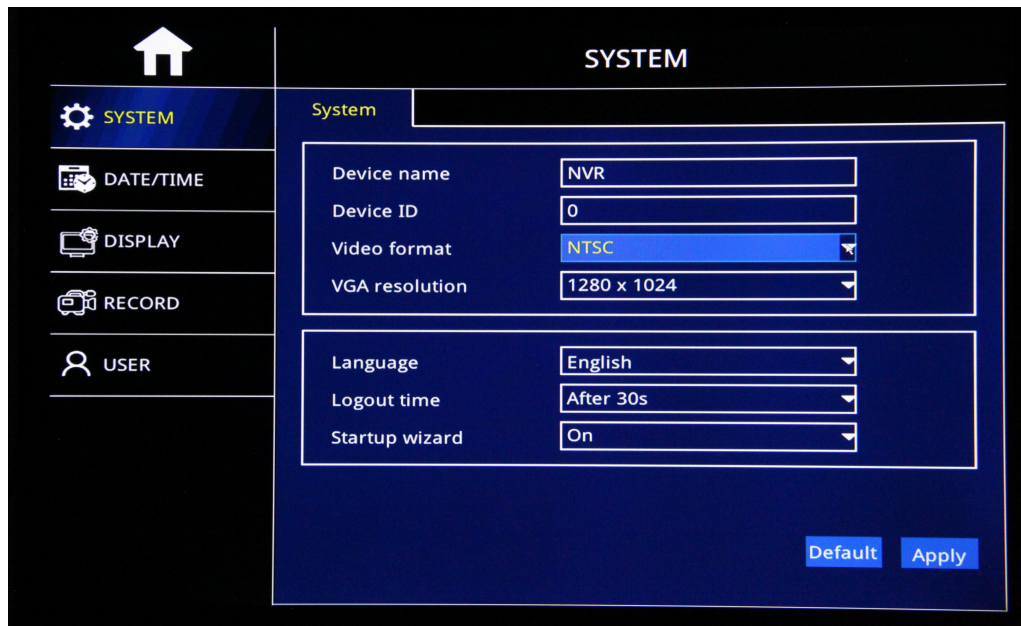

- Device Name: Edit Device name
- Video Format: PAL/NTSC adjustable.
- VGA Resolution: 1024×768、1280*1024、1366*768、1440*900、720P and 1080P adjustable based on your monitors
- Language: Chinese, English, Russia etc to set up
- Logout Time: “30s”、“1 minutes”、“3 minutes”、“5 minutes”、“10 minutes”、“Never” adjustable to log out system.
- Setup Wizard: On/Off to start/Stop Setup Wizard while start up
- Noted: After setup, Click “Apply” and Click “Default” to return
- Factory default setup.

5.2 Date/Time Setup

5.2.1 SystemDate/Time Setup

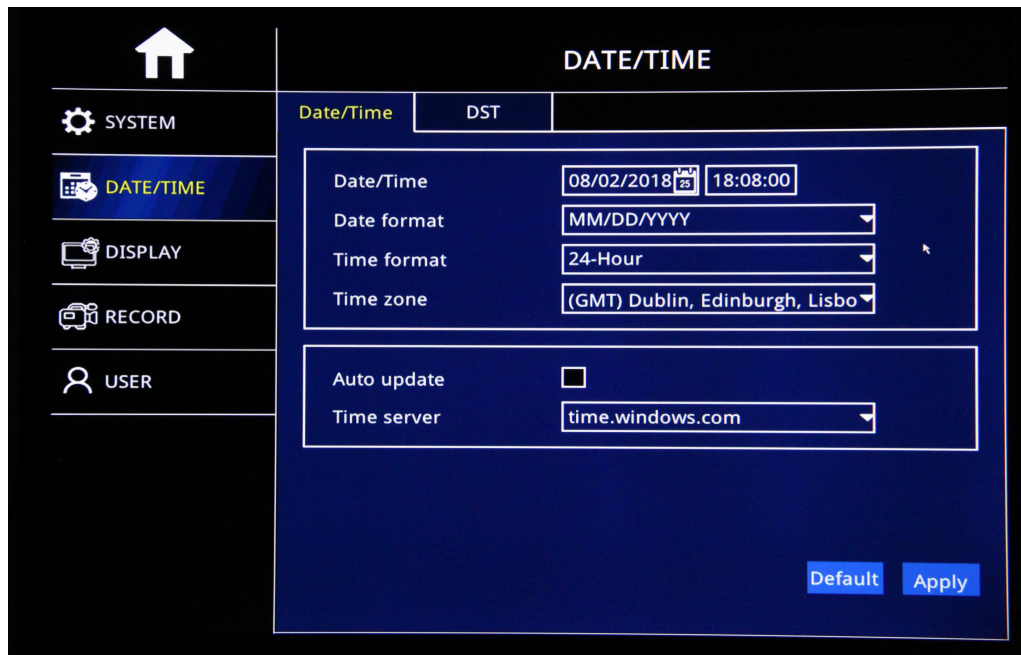

- Date/Time Setup: Click calendar Button to settle current date
- Date Format: “MM/DD/YYYY”、“YYYY-MM-DD”“DD/MM/YYYY” Optional
- Time Format: “24-Hour”/“12-Hour” Format Optional.
- Time Zone: Set Up time zone based on your relative time zone
- Noted: After Time Zone Set up, the device time will automatically adjust to be the time of relative time zone.
- Auto Update: After check “Auto update” to start the function,the
- Device will Calibrate and synchronize the time of Time Server
- Time Server: Set up relative Tim Server under down box.
- Noted: After set up, Click “Apply” to make it effective.

5.2.2 DST Setup



- Enable: After check, Enable DST time work
- Mode: Check “Week” or “Date” Mode to settle DST Start and End time
- Offset: Based on Specific DST time,Faster or Slower 1 hour or 2 hours
- From: DST Time Starting time
- To:DST time Ending time
- After the setup, Click “Apply”


5.3 Display Setup

5.3.1 Channel Setup



- CH: Channel No.

- Channel Name: Change Channel Name to Display
- Color: Click“Setting”to settle Brightness,Contrast,Hue and Saturation, After Setup, Click “Apply”,like the Picture below:

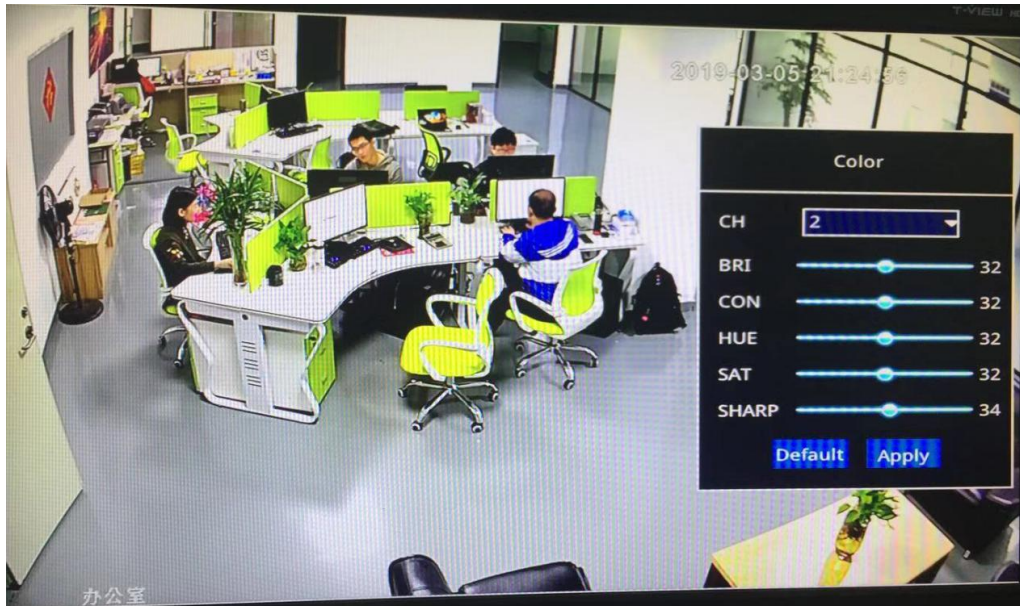

- OSD: Click “Setting”to Settle OSD time and Name
- Copy: After Set up 1Ch well, copy the same setting to Specific Channel or All Channels

5.3.2 Margin Setup



- Margin Setup: Settle Video Display Margin on Monitor


5.3.3 Auto Sequence

Optional 2 templates or Customize auto Sequence channel to cruise



- Sequence: Add auto Sequence No.
- Mode: 1*1、2*2 Model Optional.
- Channel: Settle any non-repeating channels.
- Time: Cruise interval time:1-300S Optional.

5.3.4 Main Output

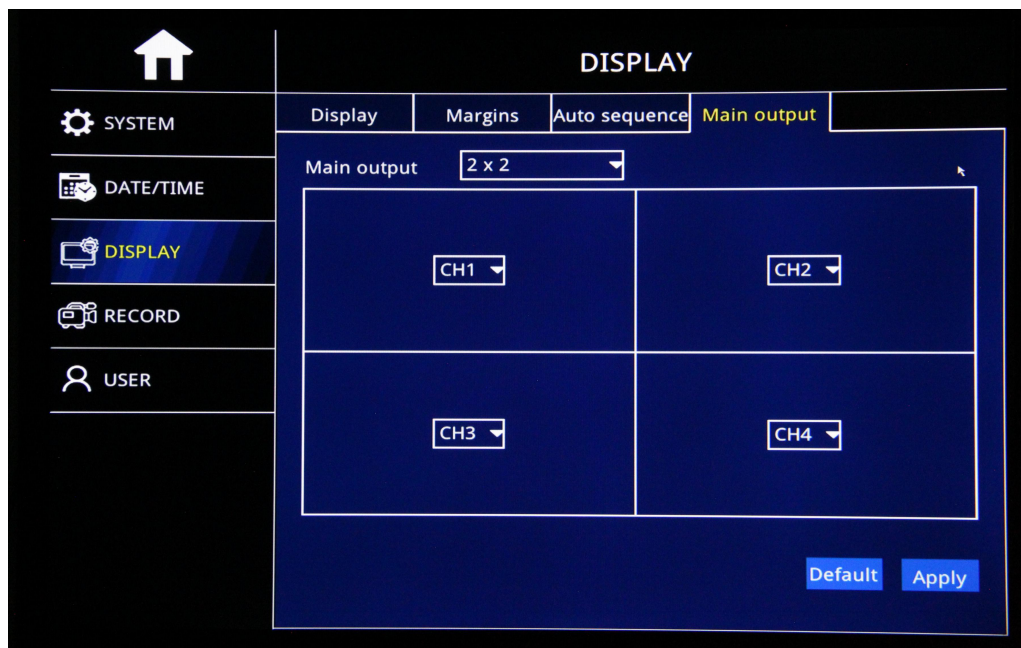

- To Set up default split screen to show on Monitor.
- Default Main output:2*2 output image, and 1*1 Output image Optional(Single Image)

5.4 Record Setup

3.4.1 Basic Setup




- Channel: Video Channel
- Enable: Check Enable to Start Channel record function, or No Record
- Audio: Check Audio to start Audio record function or No audio record
- Record Mode: “Always” and “Schedule” Mode Optional.
- Copy: After one channel setup well, copy the channel same setup to specific channel or all channels.

5.4.2 Bit Rate



- Channel: Video Channel
- Resolution: CIF/720P/1080P Optional
- Frame Rate: PAL: 1-25Frames, NTSC: 1-30 Frames Optional
- Video Quality: Best, Better, Good, Normal, 4classes Optional
- Copy: After one channel setup well, copy the channel same setup to specific channel or all channels. Best,Better,Good,Normal

5.4.3 Schedule

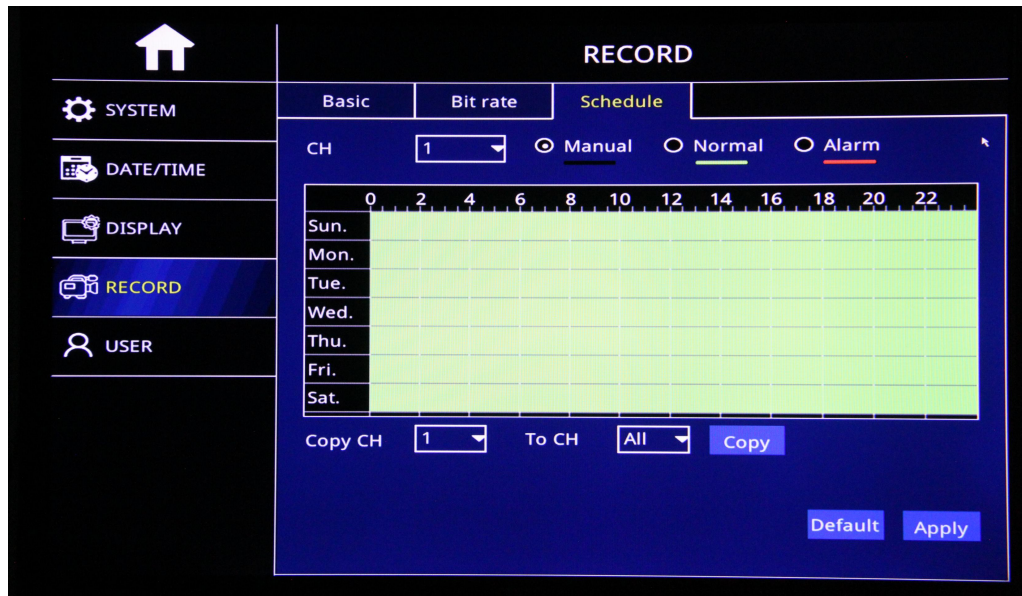


- After Stat up, Factory default real-time record
- Channel: Video Channel
- “Manuel”, “Normal” and “Alarm” Mode optional
- Double Click Record Setup Area to settle schedule time.
- Copy: After one channel setup well, copy the channel same setup to specific channel or all channels.

5.5 User Setup

5.5.1 Add Users


Add New user and configuration light

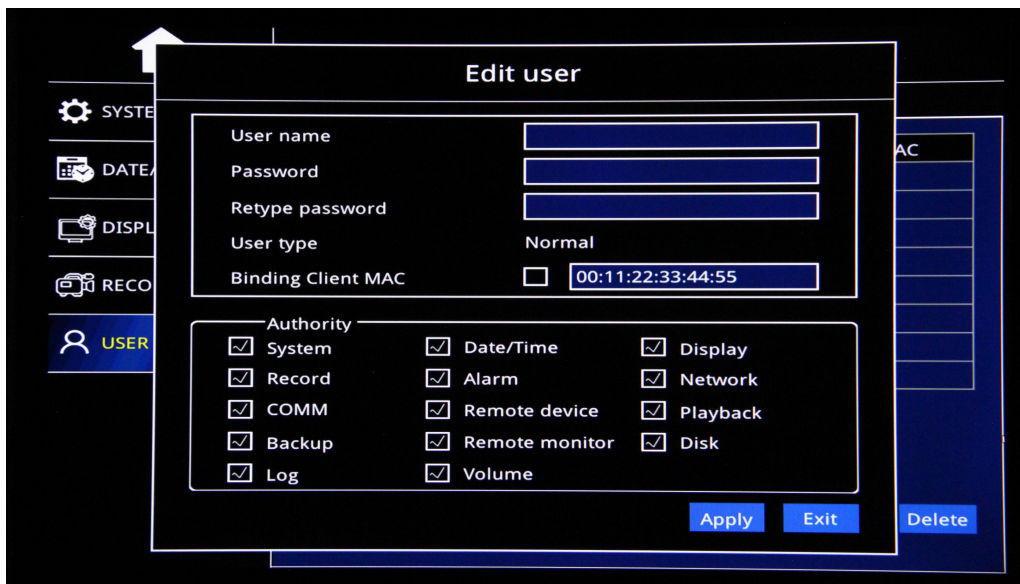

Basic: Setup User Name, Password, Retype Password, User Type
 Authority: Settle the right
 4 Advance Setup

6.1 Network Setup

6.1.1 Lan Setup

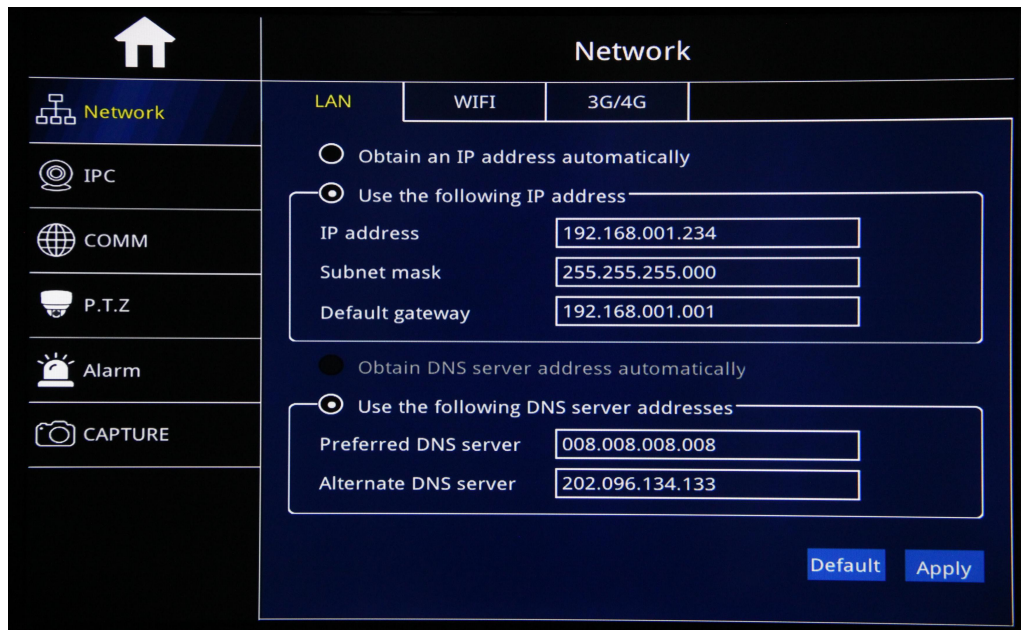

The screenshot shows a network configuration interface with a dark blue background. On the left is a sidebar with a home icon at the top and several menu items: Network (with a tree icon), IPC (with a camera icon), COMM (with a globe icon), P.T.Z (with a camera icon), Alarm (with a bell icon), and CAPTURE (with a camera icon). The main area is titled 'Network' and has three tabs: LAN (selected), WIFI, and 3G/4G. Under the LAN tab, there are two radio button options: 'Obtain an IP address automatically' (unselected) and 'Use the following IP address' (selected). Below these are three input fields: 'IP address' with the value '192.168.001.234', 'Subnet mask' with '255.255.255.000', and 'Default gateway' with '192.168.001.001'. There are also two more radio button options: 'Obtain DNS server address automatically' (unselected) and 'Use the following DNS server addresses' (selected). Below these are two input fields: 'Preferred DNS server' with '008.008.008.008' and 'Alternate DNS server' with '202.096.134.133'. At the bottom right of the main area are two buttons: 'Default' and 'Apply'.


- Obtain an IP address automatically
- Settle Static IP: IP address, Subnet Mask, Default Gateway
- Obtain DNS Server Address automatically
- Settle DNS Server Address
- Preferred DNS Server : Input Preferred DNS Server, which is the same as DNS Setup of Lan of Computer.
- Alternative DNS Server: Input Alternative DNS Server, which is the same as DNS Setup of Lan of Computer.
- Noted: After Setup , click "Apply".

6.1.2 WIFI Setup

After "Enable" WIFI, Device will auto detect WIFI hotspot, like Mobile Phone to connect with WIFI.




6.1.3 3G/4G Setup

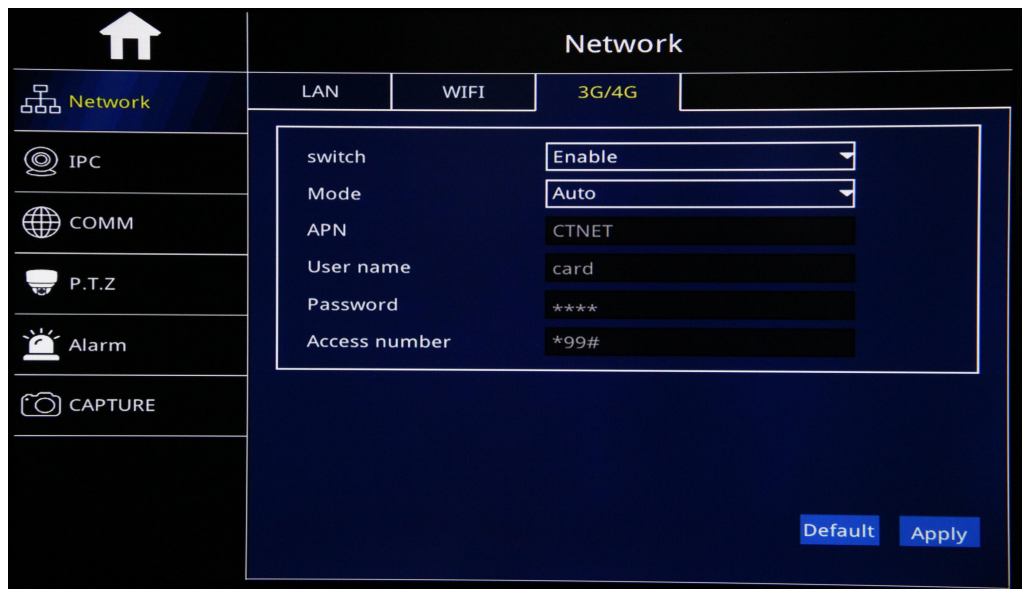

- Switch: “Enable”:Start 3G/4G Function; “Disable”: Shut off 3G/4G Function
- APN: Input APN of Sim card
- User Name: If yes, Pls kindly input Sim Card user name
- Password: If yes, Pls kindly input Sim Card Password
- Access Number: Input Dial-Up Number of Sim card

6.2 IPC Cams Set up

Check Channel and click “” Search Button and search out IPC cams address list

Remote device online

| | Device name | IP address | Port | Protocol | Type |
|--------------------------|-------------|---------------|------|----------|------|
| <input type="checkbox"/> | | 192.168.1.240 | 8899 | ONVIF | IPC |
| <input type="checkbox"/> | | 192.168.1.241 | 8899 | ONVIF | IPC |
| <input type="checkbox"/> | | 192.168.1.245 | 8899 | ONVIF | IPC |
| <input type="checkbox"/> | | 192.168.1.248 | 8899 | ONVIF | IPC |
| <input type="checkbox"/> | | 192.168.1.243 | 8899 | ONVIF | IPC |
| <input type="checkbox"/> | | 192.168.1.246 | 8899 | ONVIF | IPC |
| <input type="checkbox"/> | | 192.168.1.244 | 8899 | ONVIF | IPC |
| <input type="checkbox"/> | | 192.168.1.247 | 8899 | ONVIF | IPC |

Operate

IPC

IPC Device

| CH | Enable | Device name | Ip&Port | Operate |
|----|-------------------------------------|-------------|--------------------|---|
| 1 | <input checked="" type="checkbox"/> | | 192.168.1.240:8899 | <input type="button" value="Q"/> <input type="button" value="≡"/> |
| 2 | <input checked="" type="checkbox"/> | | 192.168.1.13:8899 | <input type="button" value="Q"/> <input type="button" value="≡"/> |
| 3 | <input checked="" type="checkbox"/> | | 192.168.1.15:8899 | <input type="button" value="Q"/> <input type="button" value="≡"/> |
| 4 | <input checked="" type="checkbox"/> | | 192.168.1.241:8899 | <input type="button" value="Q"/> <input type="button" value="≡"/> |

Check the IPC to set up and click "OK"

Add IPC address by manual: Click Edit Button "" to add IPC cams.

| Field | Value |
|-------------|-----------------|
| CH | 1 |
| Device name | |
| IP address | 192.168.001.240 |
| Port | 8899 |
| URL | |
| Remote ch | 1 |
| User name | |
| Password | |
| Protocol | ONVIF |

- CH: IPC cam Relative Channel
- Device Name: IPC Cam Name
- IP Address: Camera IPC address
- Port: IPC Cam Port
- URL:(Null)
- Remote CH: No Use
- User Name: IPC Cams User name
- Password: IPC Cams Password
- Protocol: Default ONVIF

6.3 Network Application

6.3.1 CMS

The screenshot shows the 'COMM' configuration page with the 'CMS' tab selected. The left sidebar contains icons for Network, IPC, COMM (highlighted), P.T.Z, Alarm, and CAPTURE. The main content area has a table with the following fields:

| Field | Value |
|---------------|-----------------|
| CMS | Enable |
| Device Id | 800179 |
| Center IP | 157.122.097.214 |
| Center Domain | |
| Center Port | 6608 |

Buttons at the bottom right: Default, Apply

- CMS: Enable: Start CMS Server Function, Disable: Stop CMS Server Function.
- Device ID: Device Unique ID

The screenshot shows the 'COMM' configuration page with the 'E-MAIL' tab selected. The left sidebar is the same as in the previous screenshot. The main content area has a table with the following fields:

| Field | Value |
|---------------------|-------------|
| E-MAIL | Enable |
| Mail server(SMTP) | |
| Port | 0 |
| Connection security | None |
| User name | |
| Password | |
| To | |
| CC | |
| Sending interval | Immediately |

Buttons at the bottom right: Test, Default, Apply

- Center IP: Server IP address
- Center Domain Name: If use Server IP, Do not Need to set up
- Center Port: Default Port:6608

6.3.2 E-MAIL

- E-MAIL: Enable: Start E-Mail function, Disable: Stop E-mail function.
- Mail Server(SMTP): Input Settle Email's SMTP

- Connection Security: “None”, “SSL/TLS”Optional
- User Name: Email’s address
- Password: Email’s Password
- To: Receiver’s Email address
- CC: Copy Email’s address
- Sending Interval: Immediately
- After Setup, click“Apply”

6.3.3 FTP

The screenshot shows a web interface for configuring communication settings. On the left is a navigation menu with icons and labels: Network, IPC, COMM (highlighted), P.T.Z, Alarm, and CAPTURE. The main area is titled 'COMM' and has three tabs: CMS, E-MAIL, and FTP (selected). The FTP configuration form includes the following fields:

| | |
|-------------|----------------------|
| FTP | Enable |
| FTP Server | <input type="text"/> |
| Server port | 21 |
| User name | <input type="text"/> |
| Password | <input type="text"/> |
| Folder | <input type="text"/> |

At the bottom right of the form are two buttons: 'Default' and 'Apply'.

- FTP: Enable: Start FTP Function, Disable: Shut off FTP Function.
- FTP Server: Input FTP Server (CMS Server IP)
- FTP Port: Input FTP Port.(Find in Server configuration file)
- User Name: FTP User Name (CMS user name)
- Password: FTP Password (CMS Password)
- Folder: Name FTP Folder Name
- Noted: Alarm linkage FTP,Transfer video,Timing Snapshot,linkage to FT
- To transfer Picture.

6.4 P.T.Z

| CH | Enable | Protocol | Baud rate | Address |
|----|--------------------------|----------|-----------|---------|
| 1 | <input type="checkbox"/> | 1 | 1200 | 0 |
| 2 | <input type="checkbox"/> | 1 | 1200 | 0 |
| 3 | <input type="checkbox"/> | 1 | 1200 | 0 |
| 4 | <input type="checkbox"/> | 1 | 1200 | 0 |

Copy CH: 1 To CH: All [Copy](#)

[Default](#) [Apply](#)


- Channel: Video Channel
- Enable: Check to Start PTZ function
- Protocol: “PELCO”and“PELCO-D”Optional
- Baud Rate: Relative PTZ Baud Rate, “1200”、“2400”、“4800”、“9600”
- Address: Relative PTZ Address
- Copy: Copy PTZ Setup to specific PTZ or ALL PTZ
- After Setup, Click”Apply”.

6.5 Alarm Setup

6.5.1 Motion Detection

Alarm Trigger when there is an object movement in the specified detection area.

- CH: Video Chanel。
- Enable: Check to start Motion detection function
- Sensitivity: “1”——“8”Optional,“1” means highest Sensitivity, “8”means lowest Sensitivity
- Area: Settle Motion detection area

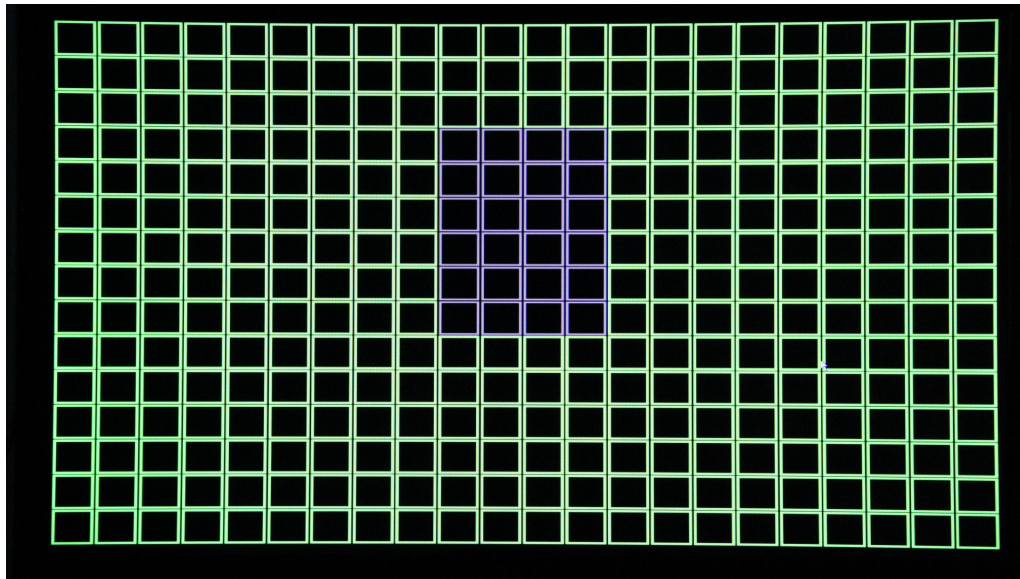

↑

Network

IPC

COMM

P.T.Z

Alarm

CAPTURE

Alarm

Motion
Sensor
Video loss
Others

| CH | Enable | Sensitivity | Area | Schedule | Trigger |
|----|-------------------------------------|-------------|----------|----------|----------|
| 1 | <input checked="" type="checkbox"/> | 2 | Settings | Settings | Settings |
| 2 | <input checked="" type="checkbox"/> | 2 | Settings | Settings | Settings |
| 3 | <input checked="" type="checkbox"/> | 2 | Settings | Settings | Settings |
| 4 | <input type="checkbox"/> | 1(Highest) | Settings | Settings | Settings |


Copy CH To CH Copy

Default
Apply

- Green Color: Represent Motion detection area,while object move,
- It will move.
- Grey: No-Motion detection Area,No Alarm trigger
- 5)Schedule: Pls kindly refer Page39 Sensor Alarm Setup



Trigger Setting: Pls kindly refer Page40 Sensor Alarm setup.

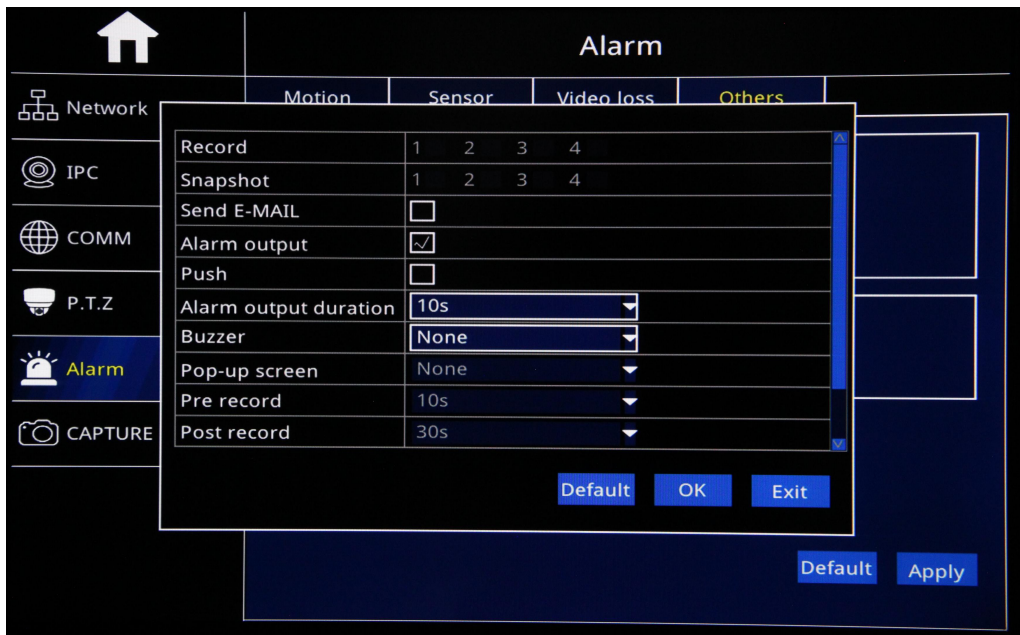

6.5.2 Sensor Alarm

I/O Sensor Alarm



- ID: Sensor Serial No.
- Enable: Check to start Sensor alarm function
- Type: No.O: Keep Open, NO.C: Keep Close to setup
- Sensor Name: Edit Sensor Name
- Settle Alarm time range, Check “None” or Alarm to
- To drag mouse to settle time zone, Red Color means Alarm time,
- Black Color means No Alarm time.
- Copy: Copy the same setup to specific CH or All CHs.
- After Setup, click “OK”.



Trigger :Alarm Linkage While alarm trigger, and click setting to go on setup,like the picture below:



- Record: Check relative channel for alarm linkage record
- Snapshot: Check relative channel for alarm linkage snapshot
- Send E-mail: Check to send settled Email while alarm trigger
- Alarm output: Check to start Alarm linkage output function
- Alarm Output Duration: 10S, 30S, 1 minute, 3 minutes, 5 minutes, 10 minutes, 15 minutes, 30 minutes optional.
- Buzzer: None, 10S, 30S, 1 minute, 3 minutes, 5 minutes, 10 minutes, 15 minutes, 30 minutes optional.
- Pop-Up Screen: Settle Amplifying Channel, 1-16 channel Optional
- Pre-Record: None, 10S, 30S, 1 minute, 3 minutes, 5 minutes, 10 minutes, 15 minutes, 30 minutes optional.
- After Setup, click "OK"

6.5.3 Video Loss

Alarm Trigger while Video IOss



- CH: Video Channel
- Enable: Check to start Video loss function
- Trigger: Alarm Linkage while alarm trigger and click "Setting" to set up. Pls kindly refer page 40 to go on setting.




6.5.4 Other




- Disk Error: Enable: Start Disk Error Alarm, Disable: Shut off Disk Error Alarm
- Disk Full: Start HDD Full Alarm, Disable: Shut off Disk Full Alarm
- Trigger: Alarm Linkage while alarm trigger and click "Setting" to set up. Pls kindly refer page 40 to go on setting.
- IP address conflict: Enable: Start IP address conflict alarm, Disable: Shut off IP address conflict alarm
- Trigger: Alarm Linkage while alarm trigger and click "Setting" to set up. Pls kindly refer page 40 to go on setting.



6.6 Capture

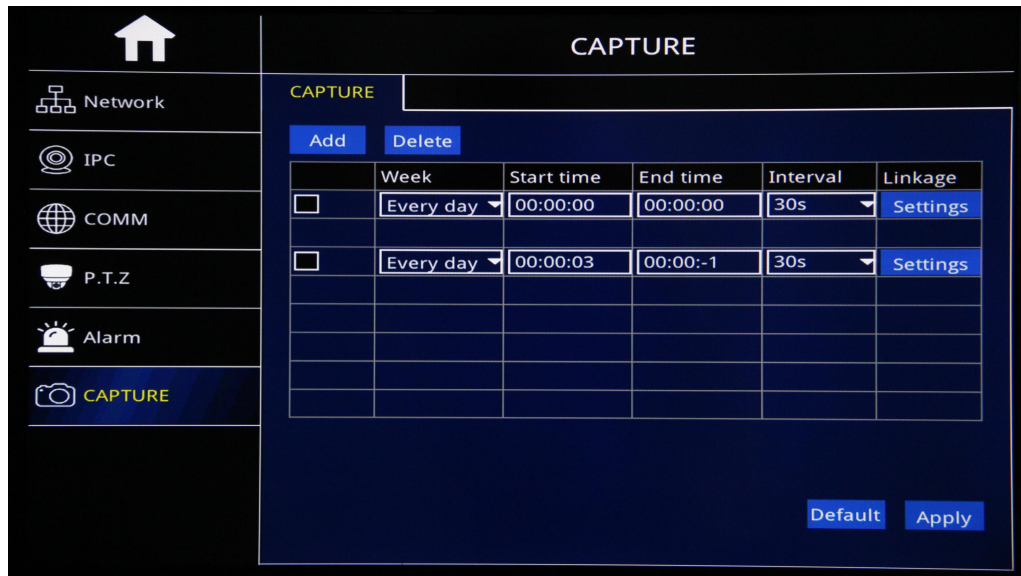

- Click “Add” to go on “Capture” setup.
- Image Processing: Send E-mail/FTP Upload Optional
- Channel Linkage: Settle linkage snapshot channels

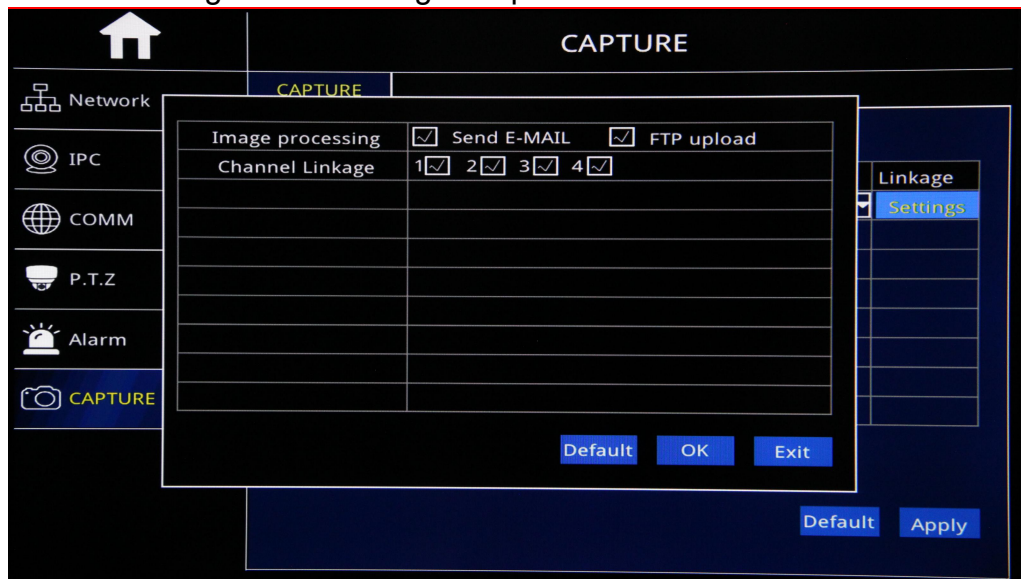


7 Search

SEARCH


| CH | Start time | End time | Type | Status | |
|--------------------------|------------|----------|----------|--------|--------|
| <input type="checkbox"/> | 3 | 14:54:29 | 15:33:08 | Normal | Unlock |
| <input type="checkbox"/> | 6 | 14:54:29 | 15:33:07 | Normal | Unlock |
| <input type="checkbox"/> | 1 | 14:54:30 | 15:33:08 | Normal | Unlock |
| <input type="checkbox"/> | 2 | 14:54:30 | 15:33:16 | Normal | Unlock |
| <input type="checkbox"/> | 5 | 14:54:30 | 15:33:06 | Normal | Unlock |
| <input type="checkbox"/> | 7 | 14:54:30 | 15:33:08 | Normal | Unlock |
| <input type="checkbox"/> | 8 | 14:54:31 | 15:33:07 | Normal | Unlock |
| <input type="checkbox"/> | 3 | 15:38:12 | 15:51:37 | Normal | Unlock |
| <input type="checkbox"/> | 5 | 15:38:12 | 15:51:38 | Normal | Unlock |
| <input type="checkbox"/> | 6 | 15:38:12 | 15:51:38 | Normal | Unlock |

- After Login “Search”, will auto search out current recorded video file and show on the right corner, like the picture above, if NO current recorded video, will be empty.
- Calendar in Left Corner:
 - A. Green Color Date means it has recorded video,
 - B. Blue Color Date means it is Current Day video,
 - C. Grey & White Color Date means it has not video,
 - D. Red Color date means it has Alarm videos

Noted: For the 1st time to login, System show Blue Color date, ie. Current Day.
- Record Type: All, Alarm and Normal Optional
- CH: Settle CHs to Search;
- Search: After the setup above (including Start time and End time Setup), Click search to search out Blue Color Date video and show on right color box.
- Back UP: Back Up recorded video into U-Disk or external HDD in H.264 or AVI format.

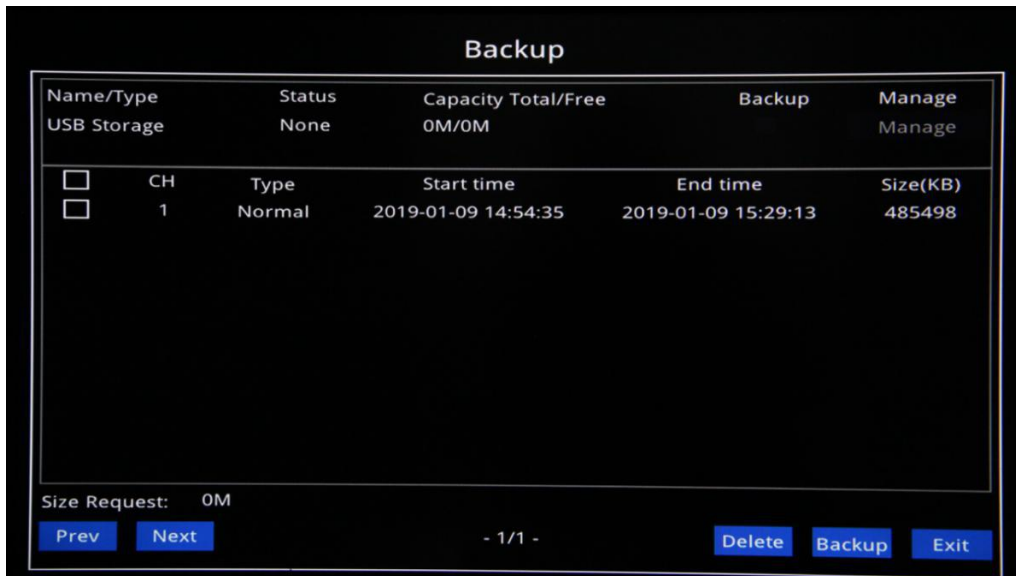


➤ Playback: After setting the “Start time” and “End time”, Click “Playback” to show the picture as follows:

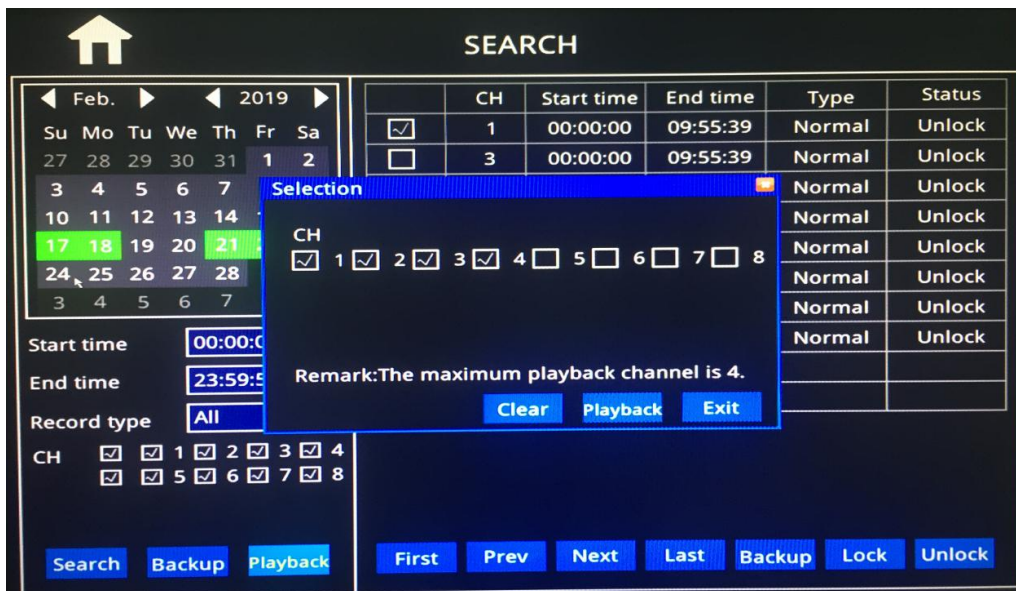

“Clear”: Clear out already checked Channels once a time

“Playback”: Playback already checked channels

After click “Playback” Button, it will show the Playback GUI below, which has 2 parts: Control Bar and Time Bar.

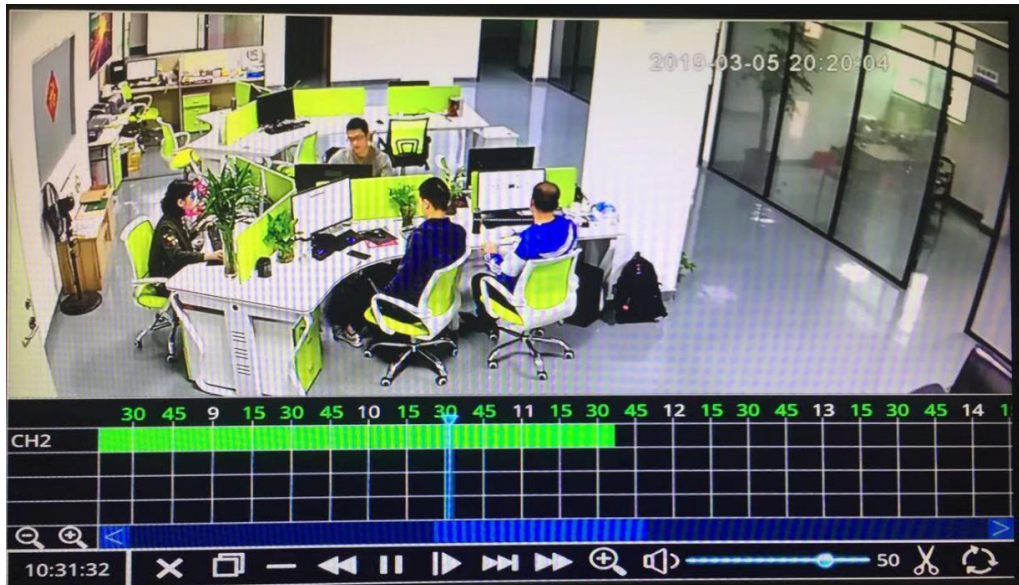

Control Bar:



: Exit Playback



: Reduce—Zoom In Control Bar



:Minimize—Zoom Out Control Bar



:Fastback—Fast Play backward



:Pause



: Playback Frame by Frame



: Slow Play



: Fast forward Play



:Digital Zoom—Drawing a Special area to zoom int



:Volume—Adjust audio output volume




:Cut out Video, 1st click to start Cut out video and  become blue; 2nd Click to end cutting

function and  return back to normal



:Back up the playback video

Time Bar:

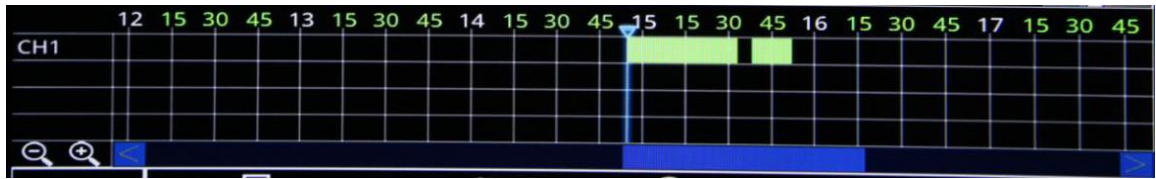

: Zoom Out Time Bar



: Zoom in Time Bar


Time Area:



White Number means Hour, like the example above:12,13,14,15,16,17

Green Number Means Minutes, Like the example above:15,30,45

Video Area:

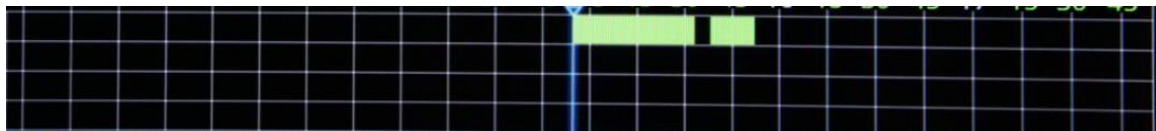

Black Color: No Video recorded

Green Color: Normal Video recorded

Red Color: Alarm Video recorded

- Lock: Lock file to protect and No delete. Check Video file and Click “Lock”, the “Status” shows “Lock”, Done.
- Unlock: Unlock the lock file to release the protection. Check Lock file and click “Unlock”, “Status” show “Unlock”, Done.

8 Log Query

LOG SEARCH

Start time: 2019-01-09 00:00:00
End time: 2019-01-09 23:59:59
Type: All

[Search](#) [Backup](#) [Clear](#)

Detail
Start:2019-01-09 15:38:15
End:Working
Device name:
Content:Remote device on the line

| Date/Time | Content | Playback |
|---------------------|---------------------------|----------|
| 2019-01-09 15:33:27 | Local login | ▶ |
| 2019-01-09 15:35:59 | Power on | ▶ |
| 2019-01-09 15:38:10 | Remote device on the line | ▶ |
| 2019-01-09 15:38:11 | Remote device on the line | ▶ |
| 2019-01-09 15:38:11 | Remote device on the line | ▶ |
| 2019-01-09 15:38:11 | Remote device on the line | ▶ |
| 2019-01-09 15:38:12 | Remote device on the line | ▶ |
| 2019-01-09 15:38:12 | Remote device on the line | ▶ |
| 2019-01-09 15:38:15 | Remote device on the line | ▶ |
| 2019-01-09 15:38:15 | Remote device on the line | ▶ |

[First](#) [Prev](#) [Next](#) [Last](#) - 1/3 -

- Type: “All”, “Alarm” and “Device” Operation Logs Optional
- Back Up: Click Back Up button to copy Relative Logs into U-Disk via USB Port
- Clear: Clear Off searched Logs on Right corner box.

9 Vehicle

9.1 Vehicle info

The screenshot shows a web interface for configuring vehicle information. The sidebar on the left includes a home icon, a 'Vehicle info' menu item (highlighted with a car icon), and a 'POWER' button. The main content area is titled 'Vehicle info' and contains a form with the following fields:

| | |
|-----------------|-------------------------------------|
| Vehicle number | <input type="text" value="800179"/> |
| Company name | <input type="text"/> |
| Vehicle license | <input type="text"/> |
| Driver name | <input type="text"/> |
| Line number | <input type="text"/> |

At the bottom right of the form, there are two buttons: 'Default' and 'Apply'.

- Device ID: Device ID to connect with Platform for remote monitoring; (Only Administrator Account can edit)
- Company Name: The company Name which device belongs to
- Vehicle Licence: Vehicle Licence Plate Number where device is installed.
- Driver Name: Driver Name of the Vehicle;
- Line Number: The Line Number of the Vehicle Running

9.2 Power Setup

The screenshot shows the 'POWER' configuration screen. On the left, there is a navigation menu with 'Vehicle info' and 'POWER' (highlighted). The main area is titled 'POWER' and contains a form with the following fields:

- Power mode: Ignition (selected in a dropdown menu)
- Ignition Delay: 0 (0-86399) Second
- Timer From: 00:00:00 To 00:00:00

At the bottom right, there are two buttons: 'Default' and 'Apply'.

- Power Mode: Ignition /Timer Mode Optional and Default Ignition Mode.
- Ignition Mode: After the ignition start, device start to record at the same time.
- Timer Mode: The device start to record at the settled time

The screenshot shows the 'POWER' configuration screen. On the left, there is a navigation menu with 'Vehicle info' and 'POWER' (highlighted). The main area is titled 'POWER' and contains a form with the following fields:


- Power mode: Ignition or Timer (selected in a dropdown menu)
- Ignition Delay: 0 (0-86399) Second
- Timer From: 00:00:00 To 00:00:00

At the bottom right, there are two buttons: 'Default' and 'Apply'.


- Ignition Delay: While user check Ignition Mode
- Can settle up ignition Delay, time Ranging 1s to 86399s, and click "Apply", which means after ignition off, the device keep work until at settled time and shut off automatically
- Time from..to: While User choose Timer Mode, Can settle the Start time
- And End time and click "Apply", Which means that Device will start at Start time and shut off at end time automatically.
- Noted: The Function only can be effective after restart.

- From: Settle Start time, the device will start at the settled time automatically.
- 2.To: Settle End time, the device will shut off at the settled time automatically.

10.HDD

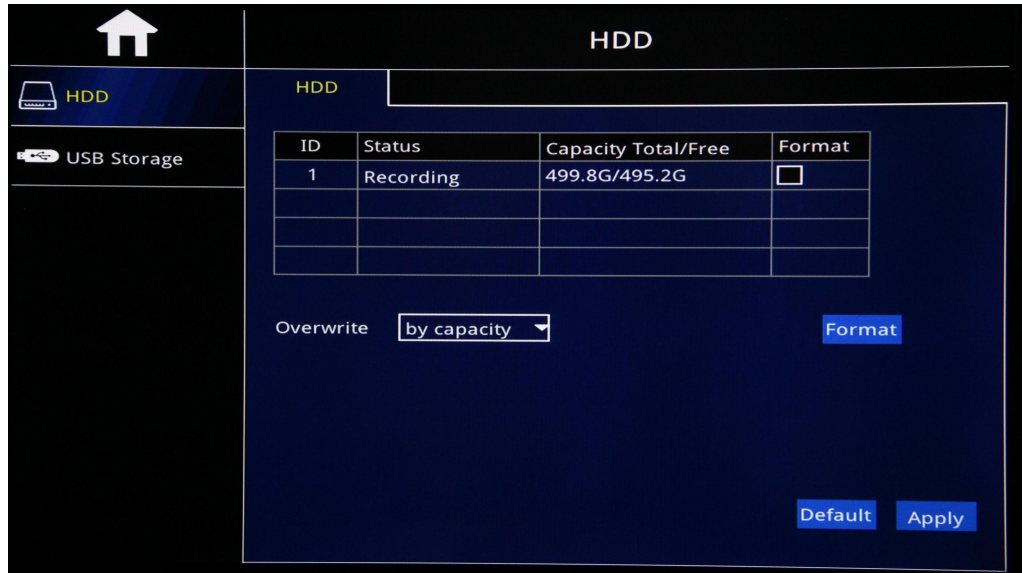

- HDD: Showing HDD status, Capacity etc info.
- Overwrite: “By Date”, “By Capacity” and “Never” Modes Optional
- Format: Check the relative HDD to click “Format” to Format HDD
- USB Storage: Well connected U-Disk with USB Port to back up recorded video/Upgrade, support Hot Plugin/Plug out.
- Noted: Need Format for 1st time use.

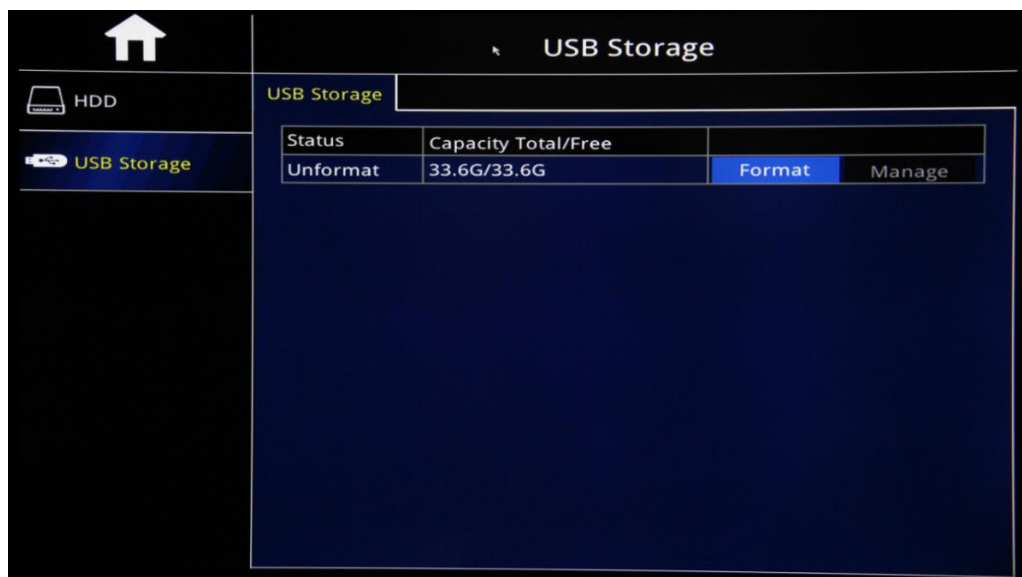

11 Information

11.1 Device

| Device | |
|------------------|-----------------------|
| Device name | NVR |
| Device ID | 0 |
| Serial NO. | NVN_A8018001122334455 |
| Firmware version | T2018121902 |
| MAC | 00:11:22:33:44:55 |


- Device Name: Check Device Name
- Device ID: Check Device ID
- Device Serial No.: Check factory Device Serial No.
- Firmware Version: Check Firmware Version
- MAC address: Check Device MAC address
- QR Code: Scan Device Serial No and download Phone APP.

11.2 Network Status

11.2.1 LAN Status

| Network status | | |
|----------------------|----------------|-------|
| LAN | WIFI | 3G/4G |
| Network status | Connected | |
| IP address(LAN) | 192.168.1.209 | |
| Subnet mask | 255.255.255.0 | |
| Default gateway | 192.168.1.1 | |
| Preferred DNS server | 202.96.134.133 | |
| Alternate DNS server | 0.0.0.0 | |
| IP address conflict | No IP conflict | |
| IP address(WAN) | 113.87.117.141 | |
| Media port | 9000 | |
| Web port | 85 | |


11.2.2 WIFI Status

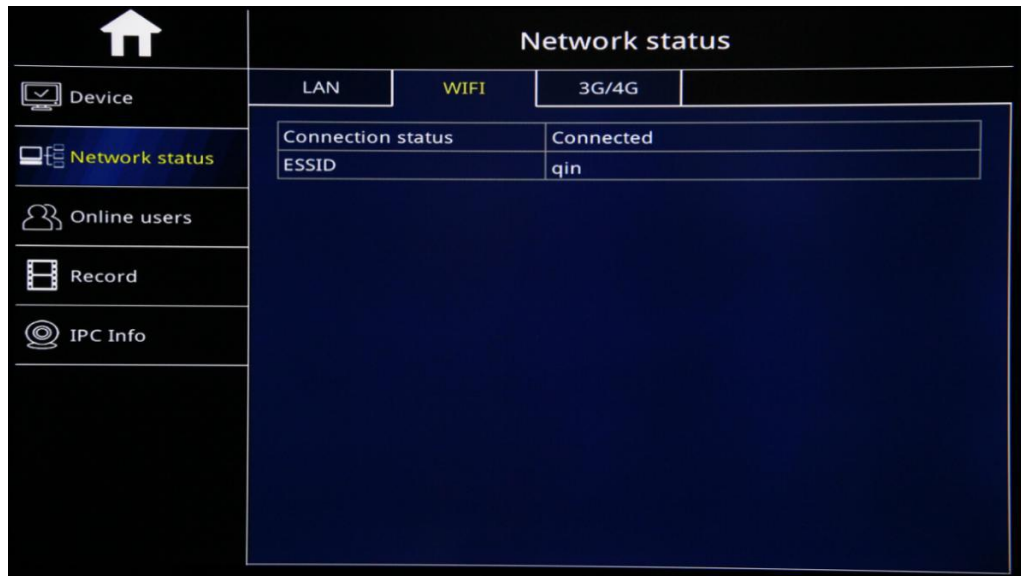


The screenshot shows a web interface with a sidebar on the left containing a home icon, a 'Device' menu item, and a 'Network status' menu item (highlighted in yellow). The main content area is titled 'Network status' and has three tabs: 'LAN', 'WIFI' (highlighted in yellow), and '3G/4G'. Below the tabs is a table with the following data:

| LAN | WIFI | 3G/4G |
|-------------------|------|-----------|
| Connection status | | Connected |
| ESSID | | qin |

11.2.3 3G/4G Status

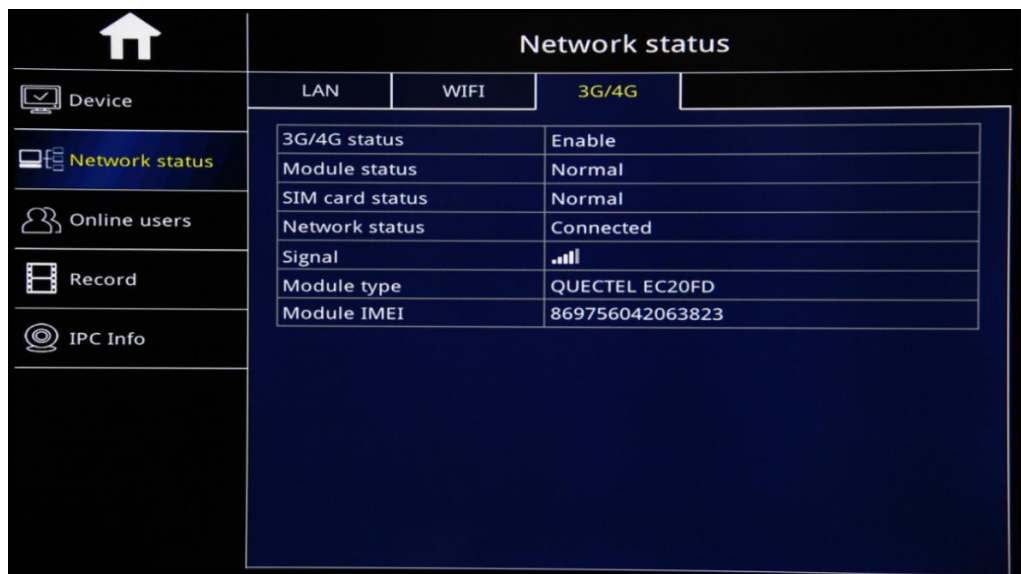

The screenshot shows the same web interface as above, but with the '3G/4G' tab selected and highlighted in yellow. The table below the tabs displays the following information:

| LAN | WIFI | 3G/4G |
|-----------------|------|---|
| 3G/4G status | | Enable |
| Module status | | Normal |
| SIM card status | | Normal |
| Network status | | Connected |
| Signal | |  |
| Module type | | QUECTEL EC20FD |
| Module IMEI | | 869756042063823 |

11.3 One Line Users

To Record users info to remote visit Device by Platform in Computer or Server, including User name, IP address, Login time and Disconnect time.

The screenshot shows a web interface with a dark blue background. On the left is a vertical navigation menu with icons and labels: a home icon, a monitor icon labeled 'DEVICE', a server rack icon labeled 'NETWORK', a person icon labeled 'ONLINE' (highlighted in light blue), a film strip icon labeled 'RECORD', and a target icon labeled 'REMOTE'. The main area is titled 'ONLINE' and contains a sub-header 'Online users' above a table with four columns: 'User name', 'IP address', 'Login time', and 'Disconnect'. The table is currently empty.

| User name | IP address | Login time | Disconnect |
|-----------|------------|------------|------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |


11.4 Record Info

The screenshot shows a web interface with a dark blue background. The left navigation menu is the same as in the previous screenshot, but the 'RECORD' option (film strip icon) is highlighted in light blue. The main area is titled 'RECORD' and contains a sub-header 'Record' above a table with five columns: 'CH', 'Resolution', 'Frame rate', 'Quality', and 'Data per hour'. The table contains four rows of data.

| CH | Resolution | Frame rate | Quality | Data per hour |
|----|------------|------------|---------|---------------|
| 1 | 1080P | 20 | Good | 1494MB |
| 2 | 1080P | 20 | Good | 1494MB |
| 3 | 1080P | 20 | Good | 1494MB |
| 4 | 1080P | 20 | Good | 1494MB |

Based the Setup of Each Channel, including Resolution,Frame Rate and Quality to calculate how much date occupied per Hour of each channel, ie: data per hour.


11.5 Cam Status

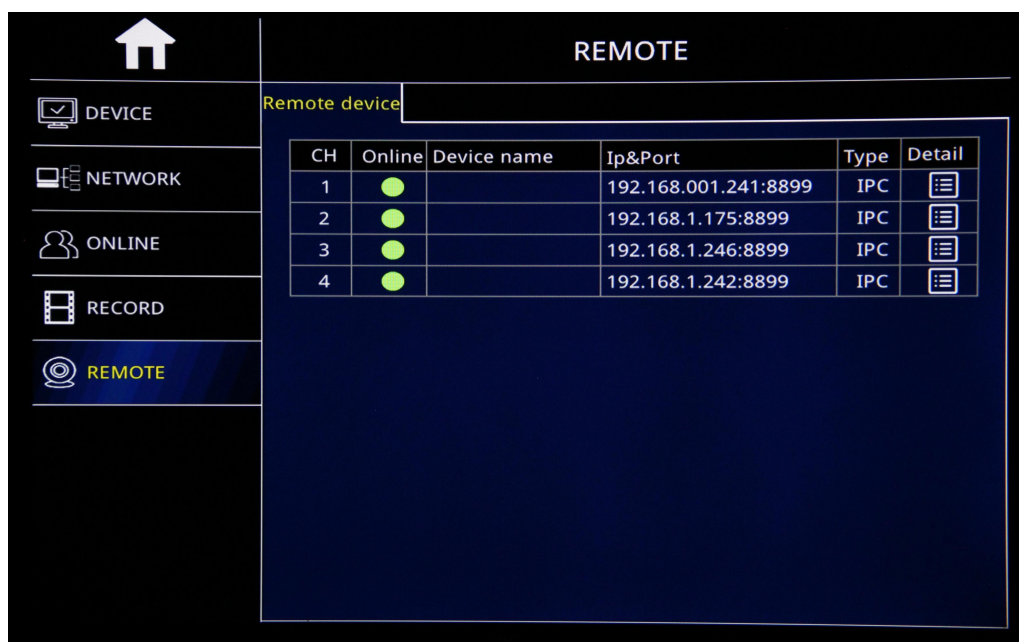

To Show Cams status, Cams device Name, IP & Port, Camera type and other detail info.

12 Maintenance

12.1 Basic

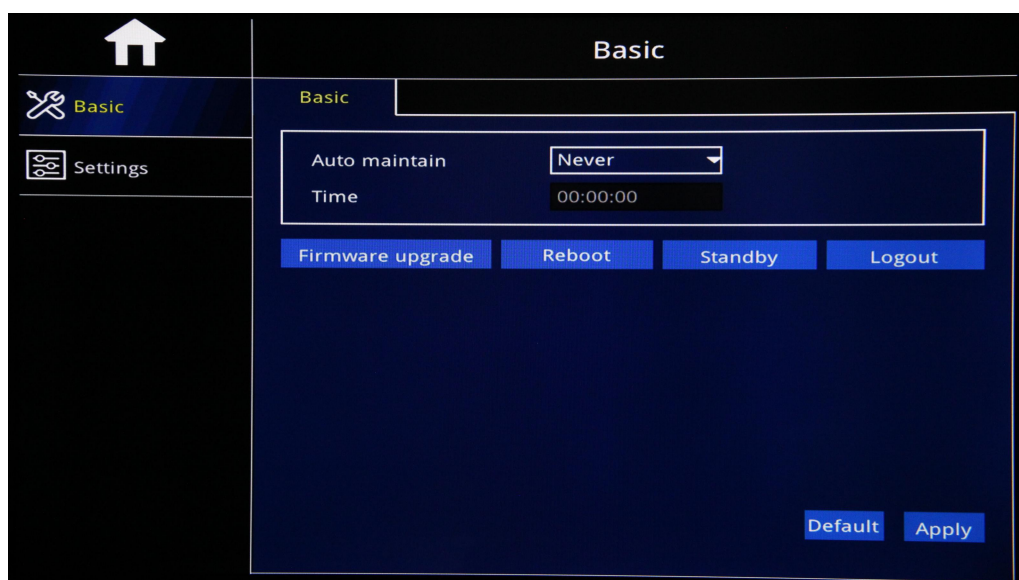

Auto Maintain

- To Settle Device Restart Maintain
- Never: Device never goes on Restart Maintain unless by manual
- Month: After choose "Month" Maintain, Will show a time Box to go on time setup, which means device will go on Restart maintain at settled time very Month

- Week:After choose “ Week” Maintain, Will show a time Box to go on time setup,which means device will go on Restart maintain at settled time very Week
- Day:After choose “ Day” Maintain, Will show a time Box to go on time setup,which means device will go on Restart maintain at settled time very Day
- 10.1.2 Firmware Upgrade
- To Create a Folder and Name“upgrade”in U-Disk, Copy upgrade file into the folder
- 2) Insert U-Disk into USB Port of Device, and Click “Firmware Upgrade”. System will Scan U-Disk and start to upgrade. While Upgrading, Do not put out of U-Disk
- Noted: After set up, click”Apply”.

Reboot

Reboot the device


Standby

After click Standby, Device come into sleep mode.

Logout

Click”Logout” and “OK”to logout system,next time,need to input password to log in

12.2 Maintain

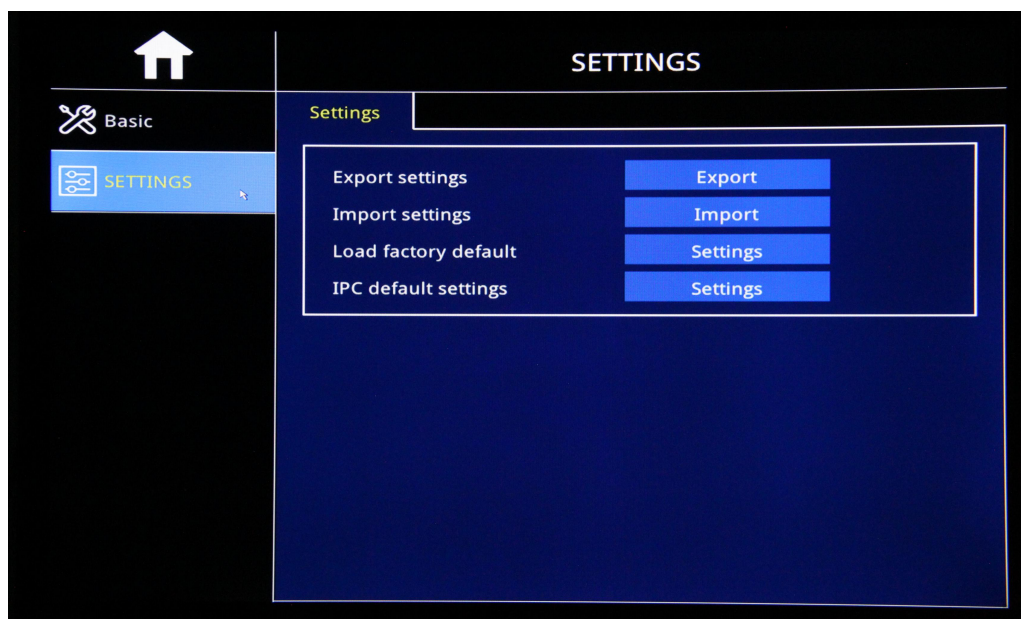

- **Export Setting:** Copy Device Setup into U-Disk to import the same setting into Other devices
- **Import Setting:** Import other device setting into the device via U-Disk.
- **Load Factory Default:**
Load Factory Default of System Setup, Display setup,Maintain Setup,Alarm Setup,Network setup,Time Setup,Record Setup etc,which you can check them separately or ALL and click” Apply” to make it effective.

➤ **IPC Default Settings:**

Load IPC Default Setting of System, Display,Image,Stream and Alarm,which can check and click"Apply"to make it effective.